


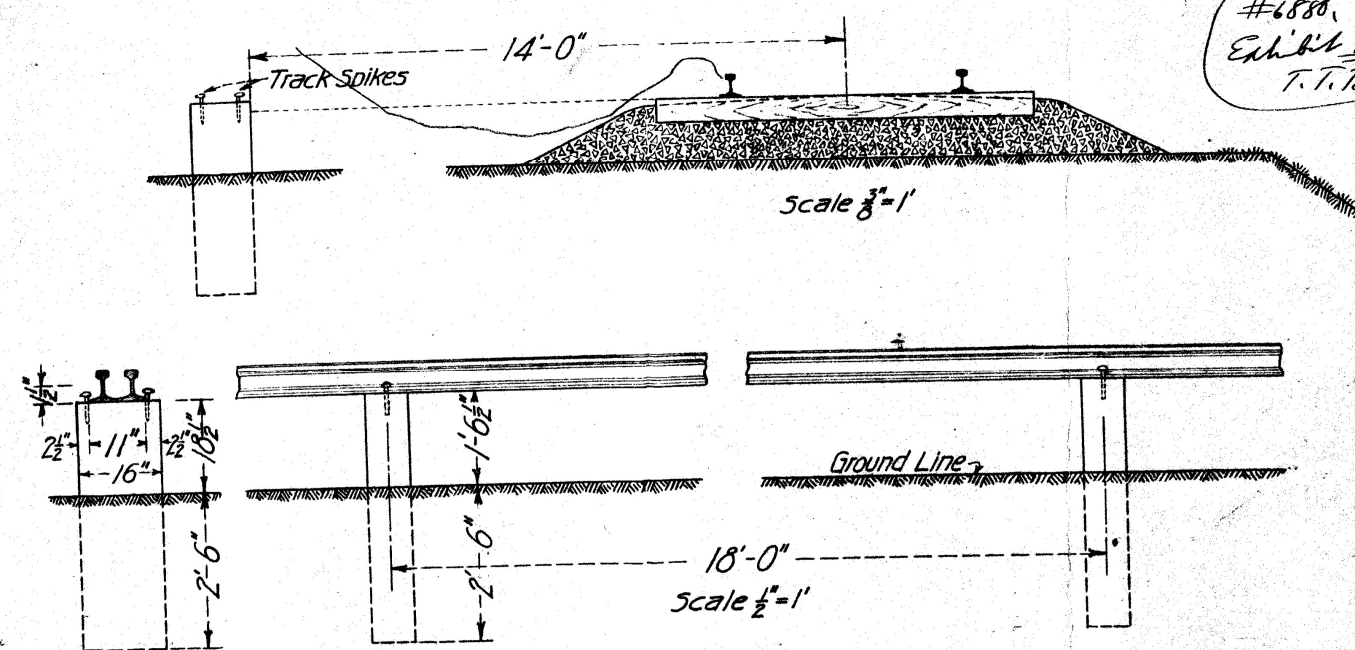

Material:- Posts, second hand timber of size about as shown.
 Painting:- All portions above ground to be painted white.
 Location:- A rack to be placed on the left hand side, going north or west, as near as possible to the north or east end of each section; then place a rack at 2 intermediate points, about $\frac{1}{3}$ the length of a section apart. Place at favorable points so that rails when on rack will be as near level of track tie as possible.

ROCK ISLAND LINES
 RAIL RACK
 CHIEF ENGINEER'S OFFICE CHICAGO, ILL.
 SCALE

ADOPTED: JULY 6, 1915

APPROVED

APPROVED

Chief Eng'r.

Chief Operating Officer

INDEX NUMBER
 523-9
 1 Sheet of 12