


210' - 30" TILE, AV. DEP 740 GR. DEP 1200
14 Cu Yds OF CONCRETE IN 2 BULKHEADS

Note: The tile average shown above includes the
railway embankment and nothing extra will
be paid for going under it.

This tile is located near the center of Section 5-89-36
at the upper end of the open ditch

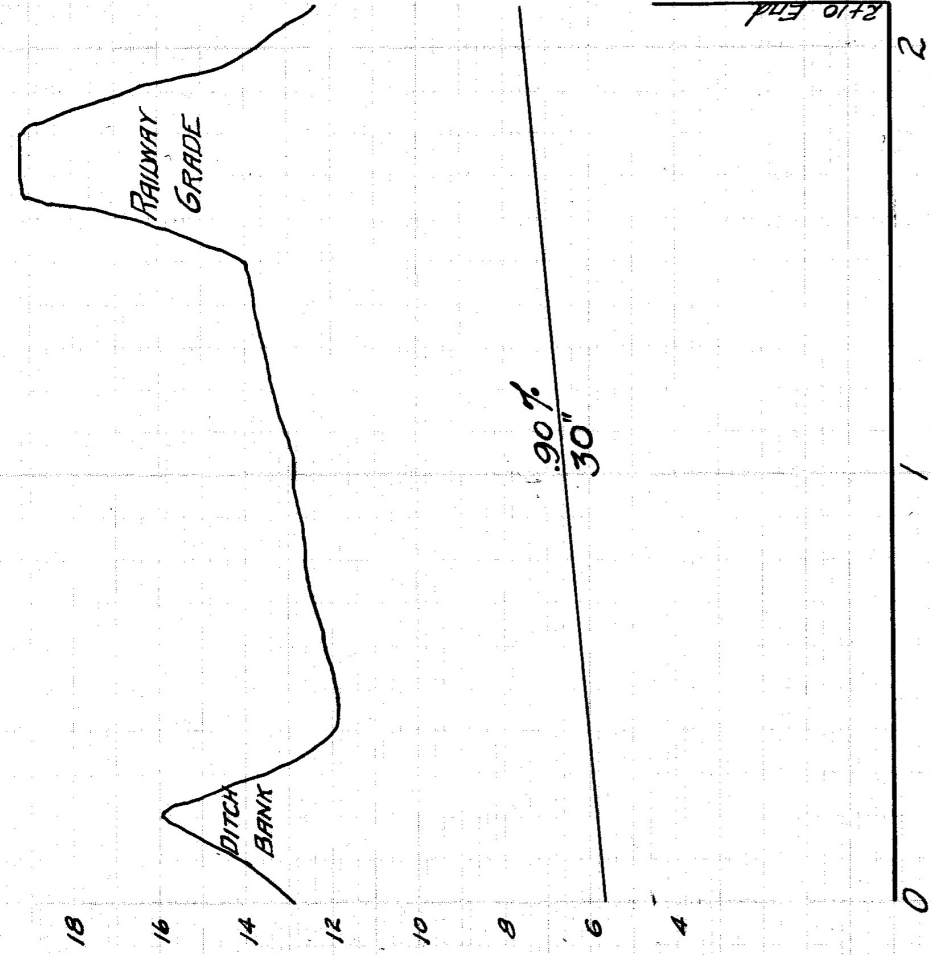

PROFILE OF COLLECTING TILE

DRAINAGE DISTRICT

36-38

Storm Lake Ia. Dec. 1916.

A.H. Cunningham Eng'r